


Pressure Gauge



Axial

Radial

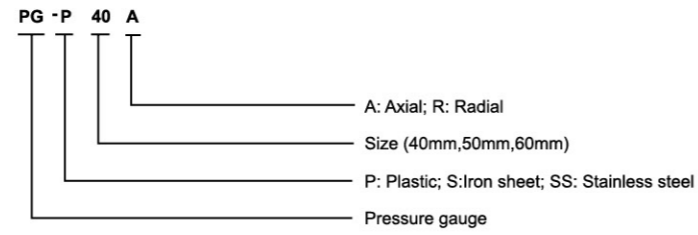

- Two connection types: (1)G1/4" (2)M10×1
- For 40mm gauge, the scale: 0-6 bar
- For 50mm gauge, the scale: 0-10 bar or 0-6 bar
- Back/bottom connection

Electromagnetic Switch



PS-04A

Rated Voltage	220~240V	110~120V
Max.Power	1.1 kW	1.5 kW
Power Frequency	50/60 Hz	
Max. Using Current	10 A	
Start Pressure Setting	1.2 bar / 1.5 bar / 2.2 bar	
Max. Working Pressure	10 bar	
Connection Thread	G1"	
Protection Rating	IP65	
Max. Working Temperature	55 °C	
Cable	1.6m plug cable 45cm pump connection cable	



PS-04B

Rated Voltage	220~240V	110~120V
Max.Power	1.1 kW	1.5 kW
Power Frequency	50/60 Hz	
Max. Using Current	10 A	
Start Pressure Setting	1.2 bar / 1.5 bar / 2.2 bar	
Max. Working Pressure	10 bar	
Connection Thread	G1"	
Protection Rating	IP65	
Max. Working Temperature	55 °C	
Cable	1.6m plug cable 45cm pump connection cable	

Optional: Working pressure adjustable



PS-04C

Rated Voltage	220~240V	110~120V
Max.Power	1.1 kW	1.5 kW
Power Frequency	50/60 Hz	
Max. Using Current	10 A	
Start Pressure Setting	1.5 bar / 2.2 bar	
Max. Working Pressure	10 bar	
Connection Thread	G1"	
Protection Rating	IP54	
Max. Working Temperature	55 °C	
Cable	1.6m plug cable 45cm pump connection cable	



PS-04D

Rated Voltage	220~240V	110~120V
Max. Power	2.2 kW	1.1 kW
Frequency	50/60 Hz	
Max. Current	30 A	
Starting Pressure Setting	1.2 bar	1.5 bar
Max. Operating Pressure	10 bar	
Connection Thread	G1" ; G1 1/4"	
Protection Class	IP65	
Max. Operating Temperature	55 °C	
Cable	1.6m plug cable 45cm pump connection cable	